

**Front Vision
Approved
High Quality
Monitor**



Inputs



Switch



Backlight



Power &
Trigger
12V/24V



PAL /
NTSC
Manual



Dimmer









Normal
RЯ
Mirror




Normal
RЯ
Mirror






LCD size	7 inch (17.8 cm) 16:9 wide screen
Backlight	450 cd/m2
Backlight type	LED (long life time, immediately bright)
Resolution	800 (Vertical) x 480 (Horizontal) x RGB = 1152000 (Dots)
Video system	PAL / NTSC auto
Video signal	Composite CVBS (FBAS)
View angle	Left 60° Right 60° Up 40° Down 60°
Dimmer function	Auto / Manual
Camera inputs	4 (4P mini DIN)
Screen options	Full / Split 1 / Split 2 / Tripl 1 / Tripl 2 / Quad
Triggers	12~32 Volt DC (adjustable delay time 0~9 seconds)
Voltage	12~32 Volt DC
Current	Max. 650 mA
Operating temperature	-10°C ~ +60°C
Menu languages	English / German / Dutch / French / Italien
Feature(s)	Rubber painted, Lighted buttons
Extras included	Heavy duty monitor stand, Rubber sun shield

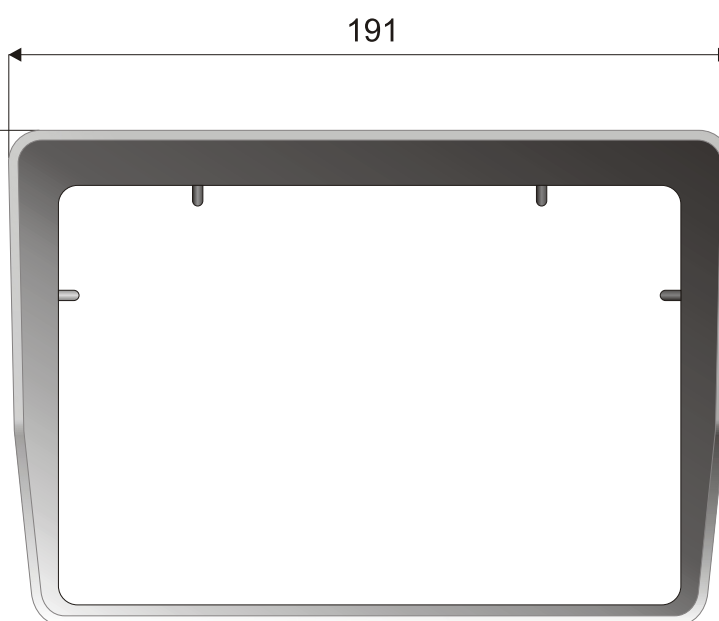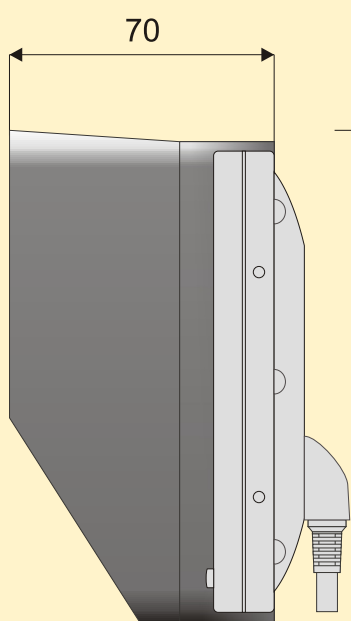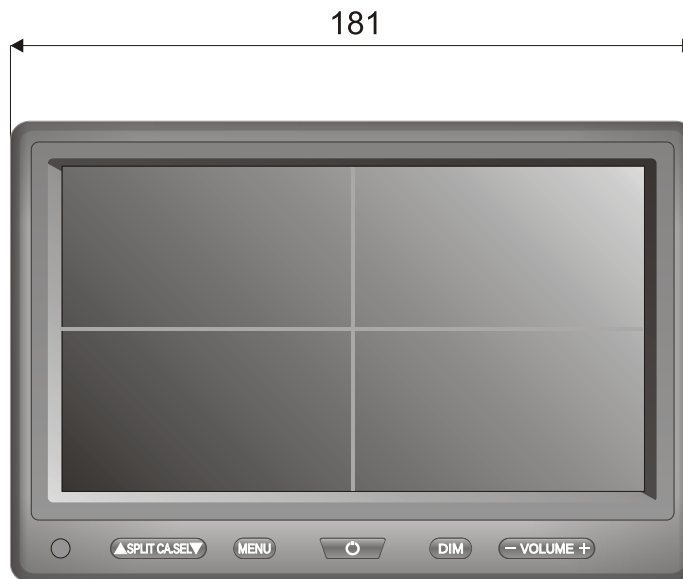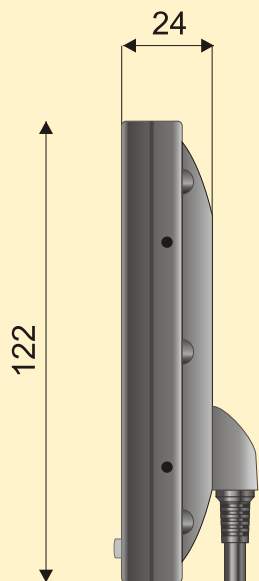

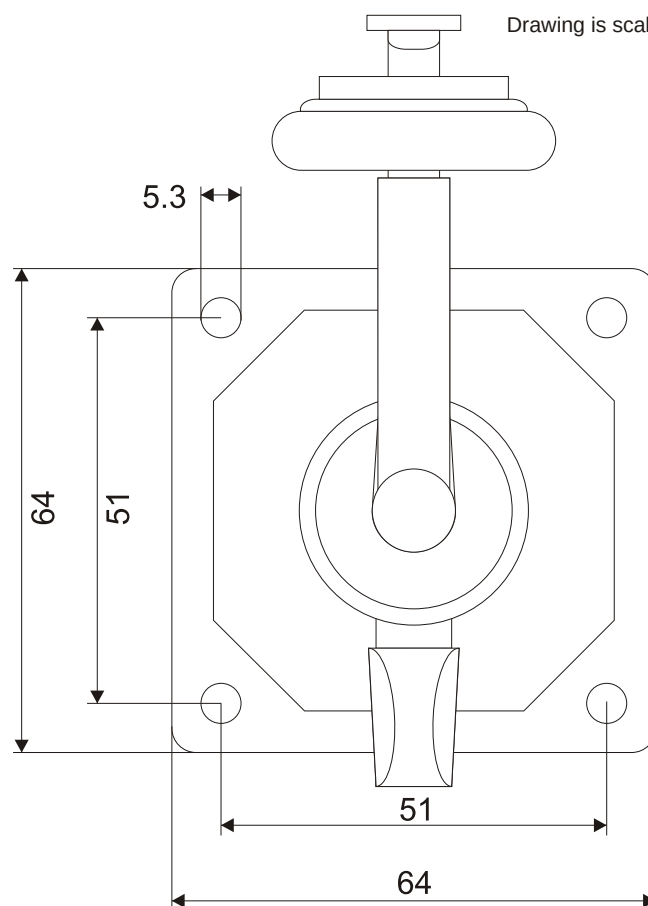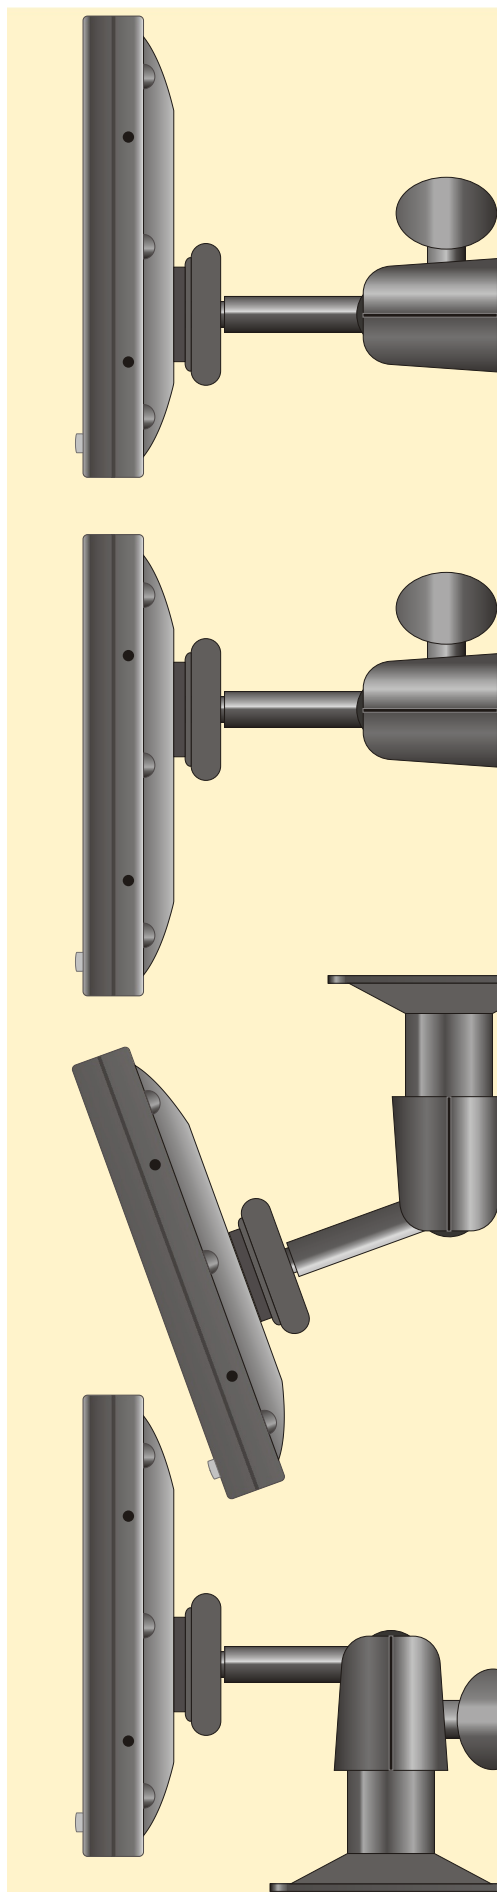


Drawing is scale 1:1

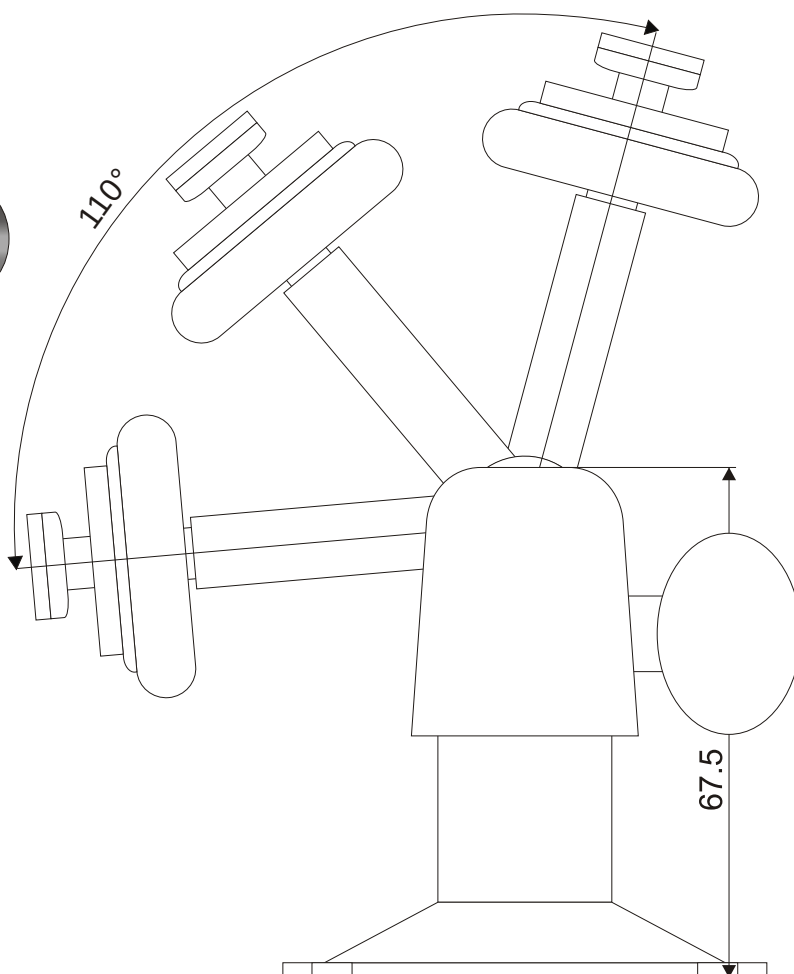

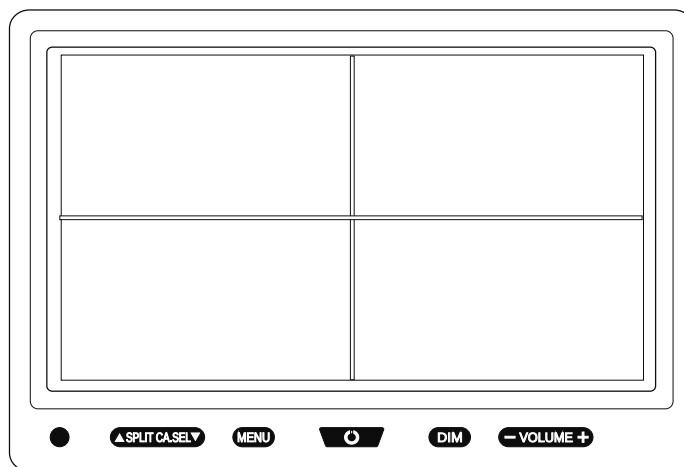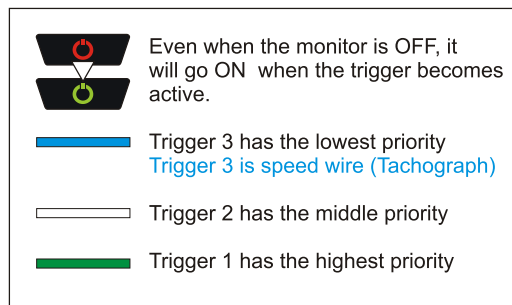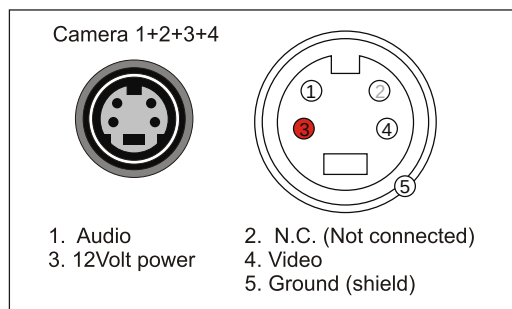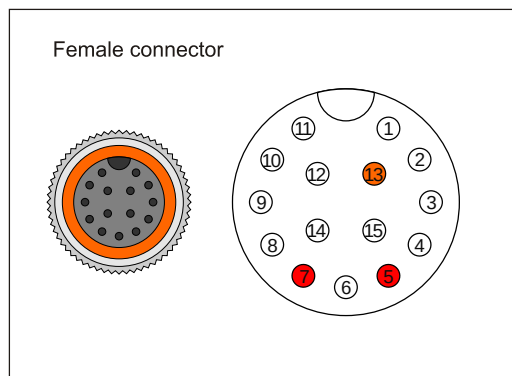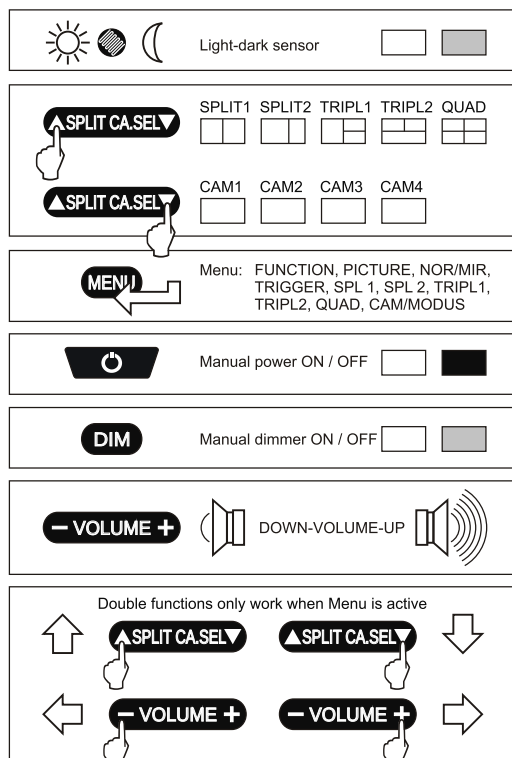

1. VIDEO, CA1
2. AUDIO, CA1
3. VIDEO, CA4
4. T BLAUW
5. 12V, CA1
6. 12V/24V ACC
7. 12V, CA2+3+4
8. T WIT
9. AUDIO, CA2
10. VIDEO, CA3
11. VIDEO, CA2
12. T GROEN
13. 12V HEATER/MEM
14. -
15. GROUND

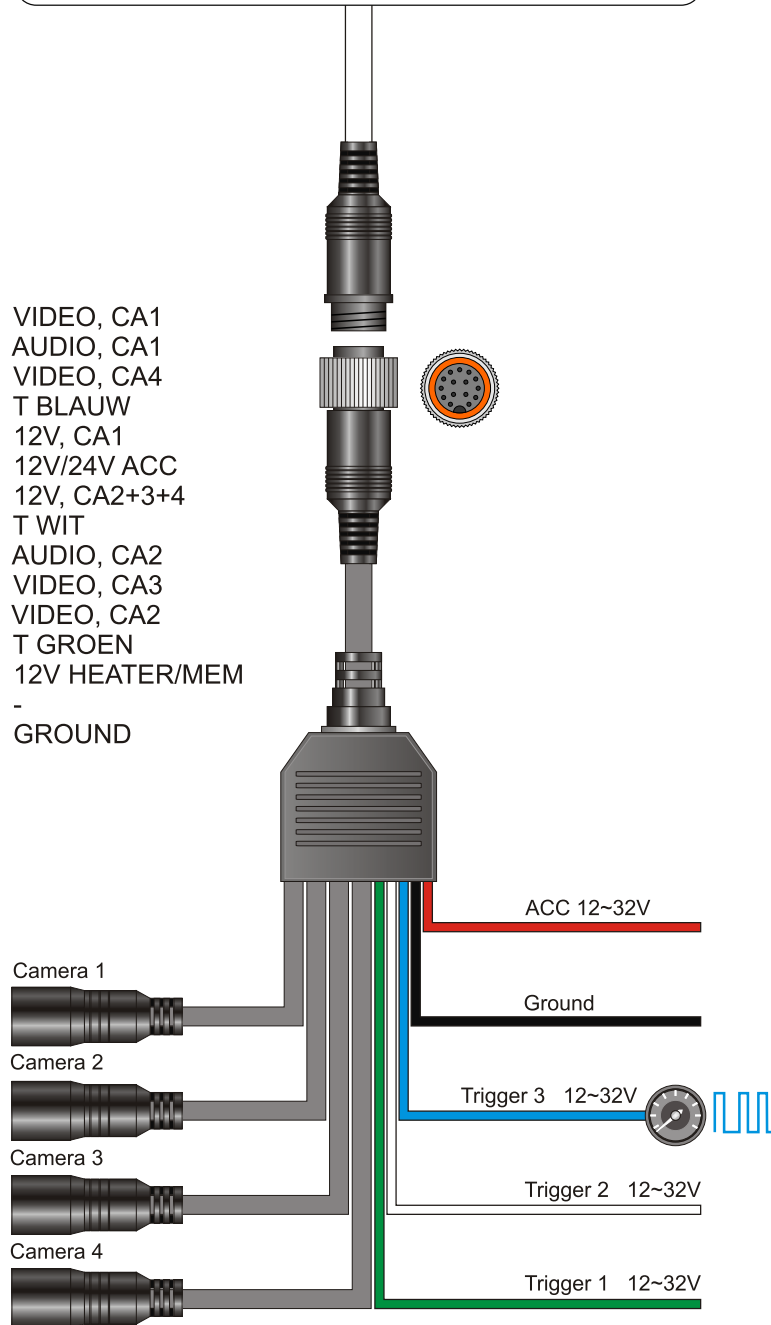

FUNKTIE	
TAAL	DUTCH
SYSTEEM	PAL
DIMMER	AUTO
RESET	▶

FUNKTIE	TAAL	NEDERLANDS
SYSTEEM	SYSTEEM	PAL / NTSC
DIMMER	DIMMER	AAN / AUTO
RESET	RESET	>

BEELD	
CONTRAST	50
HELDERHEID	50
KLEUR	50
TINT	50


BEELD	CONTRAST	0 ... 50 ... 100
HELDERHEID	HELDERHEID	0 ... 50 ... 100
KLEUR	KLEUR	0 ... 50 ... 100
TINT	TINT	0 ... 50 ... 100

NOR/SPIEGEL	
CA1	NORMAAL
CA2	SPIEGEL
CA3	SPIEGEL
CA4	NORMAAL



NOR/SPIEGEL	CA 1	NORMAAL / SPIEGEL
	CA 2	NORMAAL / SPIEGEL
	CA 3	NORMAAL / SPIEGEL
	CA 4	NORMAAL / SPIEGEL

TRIGGER	
TRIG 1	CA1
TRIG 2	CA2
TRIG 3	CA3
TRIG 1 TIJD	1
TRIG 2 TIJD	3
TRIG 3 TIJD	3



TRIGGER	TRIG 1	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/TRIPL1/TRIPL2/QUAD
	TRIG 2	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/TRIPL1/TRIPL2/QUAD
	TRIG 3	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/TRIPL1/TRIPL2/QUAD
	TRIG 1 TIJD	0 1 ... 9
	TRIG 2 TIJD	0 3 ... 9
	TRIG 3 TIJD	0 3 ... 9

TACHOGRAAF	
SNELHEID	AAN
SNELHEID	SPLIT2
PRIORITY	(2) WHITE
VERTAGING	5
FREQUENTIE	67Hz



TACHOGRAAF	SNELHEID	AAN / UIT
	SNELHEID	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/TRIPL1/TRIPL2/QUAD
	PRIORITY	(2) WHITE / (3) BLUE
	VERTRAGING	0 5 . . . 9
	FREQUENTIE	10 - 101 Hz

SPLIT 1	
BRON 1	CA1
BRON 2	CA2
GELUID	CA1



SPLIT1	BRON 1	CA1 / CA2 / CA 3 / CA4
	BRON 2	CA1 / CA2 / CA 3 / CA4
	GELUID	CA1 / CA2 / CA 3 / CA4

SPLIT 2	
BRON 1	CA1
BRON 2	CA2
GELUID	CA1



SPLT2	BRON 1	CA1 / CA2 / CA 3 / CA4
	BRON 2	CA1 / CA2 / CA 3 / CA4
	GELUID	CA1 / CA2 / CA 3 / CA4

TRIPLE1	
BRON 1	CA1
BRON 2	CA2
BRON 3	CA3
GELUID	CA1



TRIPLE1	BRON 1	CA1 / CA2 / CA 3 / CA4
	BRON 2	CA1 / CA2 / CA 3 / CA4
	BRON 3	CA1 / CA2 / CA 3 / CA4
	GELUID	CA1 / CA2 / CA 3 / CA4

TRIPLE2	
BRON 1	CA1
BRON 2	CA2
BRON 3	CA3
GELUID	CA1



TRIPLE2	BRON 1	CA1 / CA2 / CA 3 / CA4
	BRON 2	CA1 / CA2 / CA 3 / CA4
	BRON 3	CA1 / CA2 / CA 3 / CA4
	GELUID	CA1 / CA2 / CA 3 / CA4

QUAD	
BRON 1	CA1
BRON 2	CA2
BRON 3	CA3
BRON 4	CA4
GELUID	CA1





QUAD	BRON 1	CA1 / CA2 / CA 3 / CA4
	BRON 2	CA1 / CA2 / CA 3 / CA4
	BRON 3	CA1 / CA2 / CA 3 / CA4
	BRON 4	CA1 / CA2 / CA 3 / CA4
	GELUID	CA1 / CA2 / CA 3 / CA4

CAM/MODUS	
CA 1	AAN
CA 2	AAN
CA 3	AAN
CA 4	UIT
SPLIT 1	UIT
SPLIT 2	AAN
TRIPLE1	AAN
TRIPLE2	AAN
QUAD	UIT



CAM/MODUS	CA 1	AAN / UIT
	CA 2	AAN / UIT
	CA 3	AAN / UIT
	CA 4	AAN / UIT
	SPLIT 1	AAN / UIT
	SPLIT 2	AAN / UIT
	TRIPLE1	AAN / UIT
	TRIPLE2	AAN / UIT
	QUAD	AAN / UIT

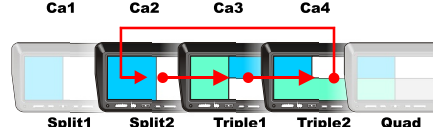

>5 Seconde



>5 Seconde