





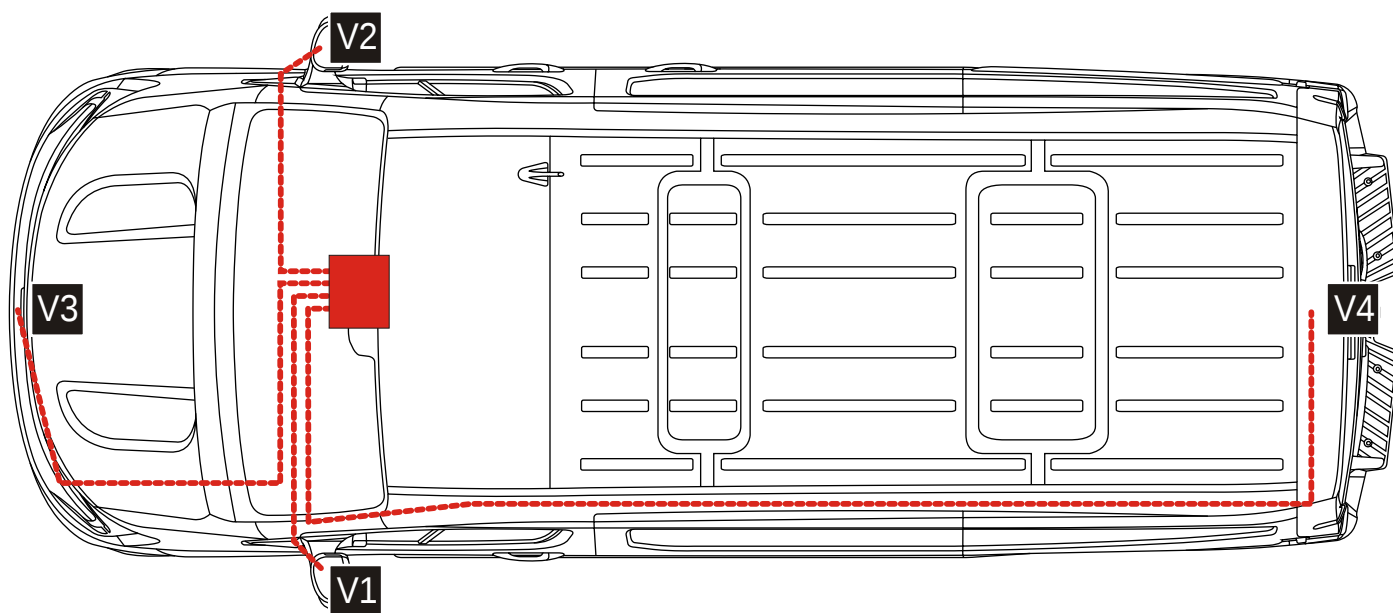


Renault Master All-in-One

Installation instructions camera interface

Suitable for OpenR Link All-in-One unit (Without factory Google navigation)
(models from 2024~)

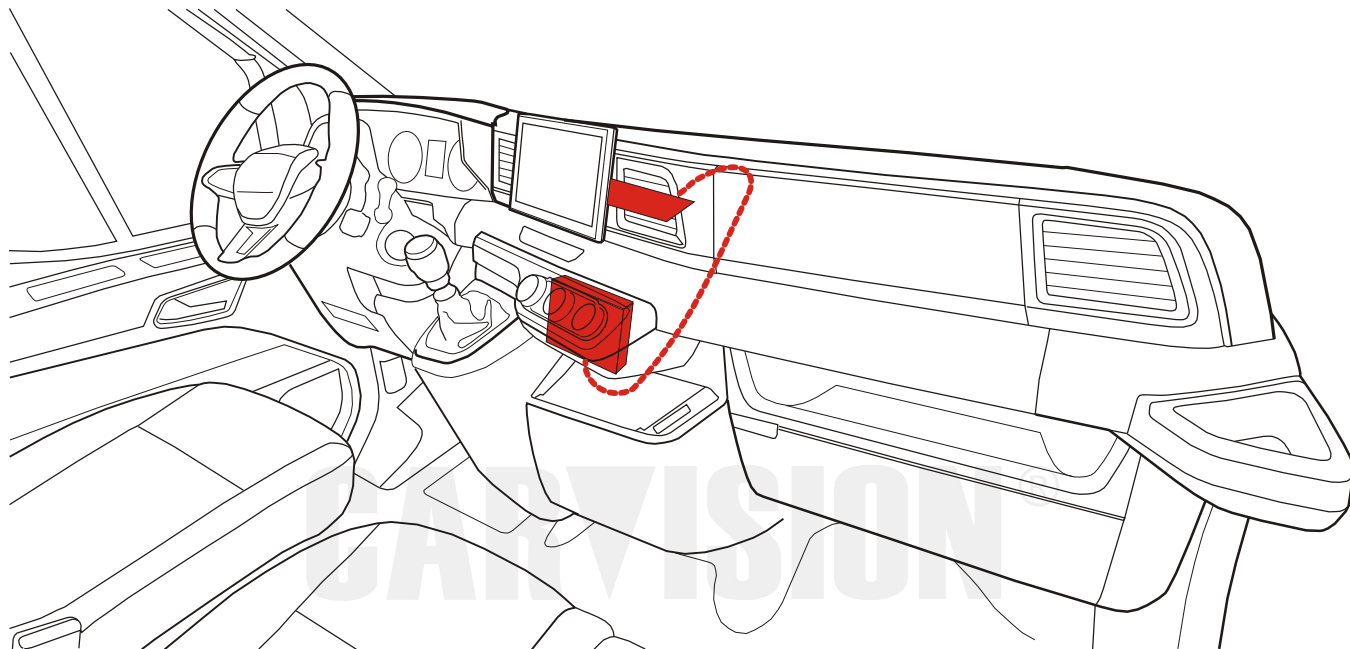









Art.nr. **300 400**















1080P
AHD



CVBS
VIDEO

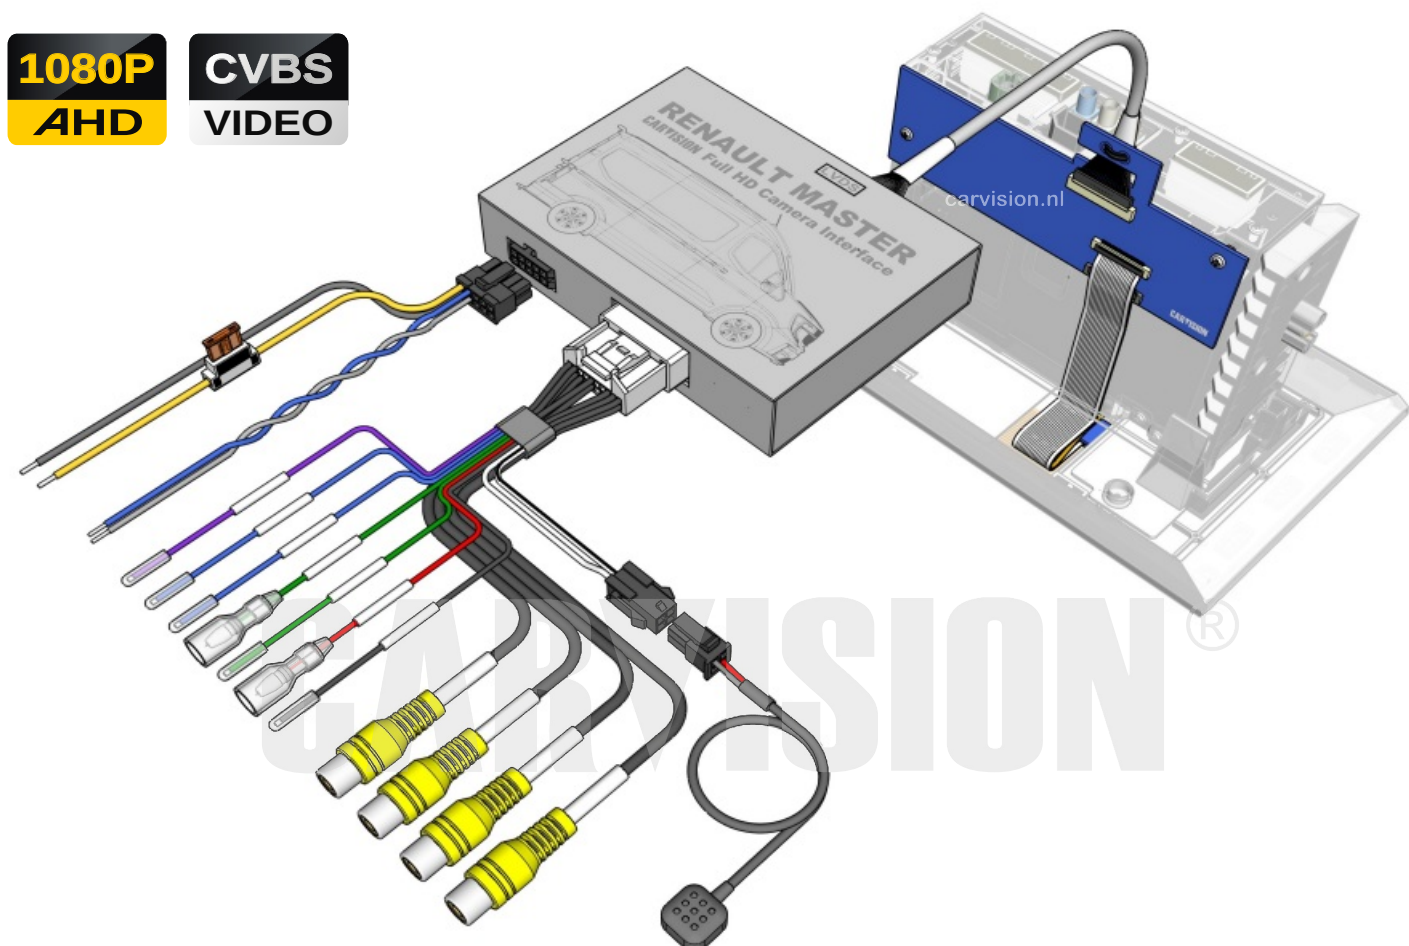

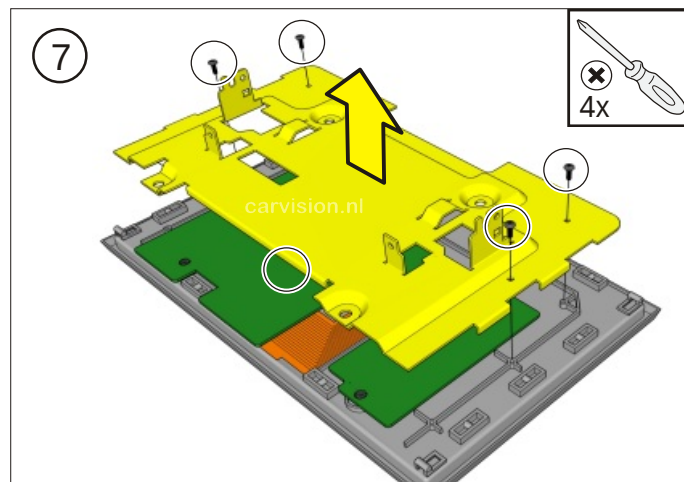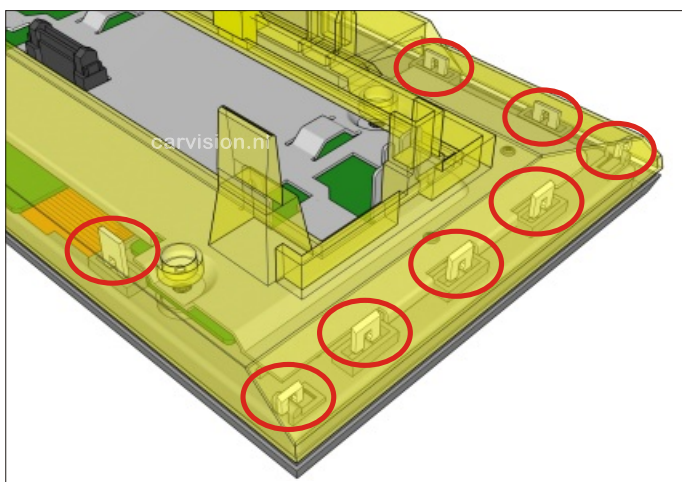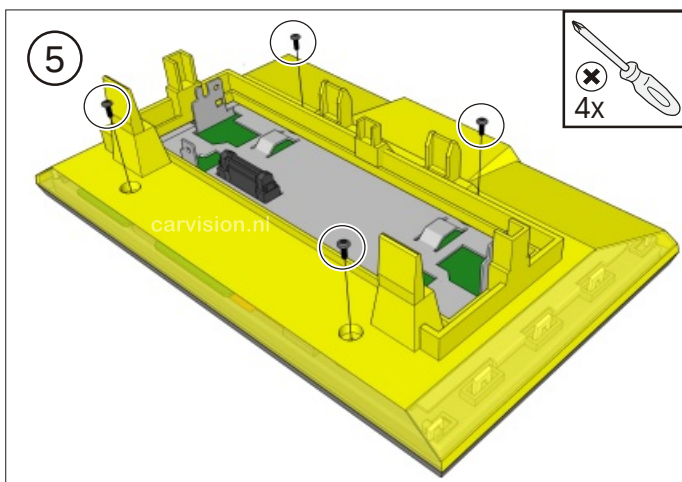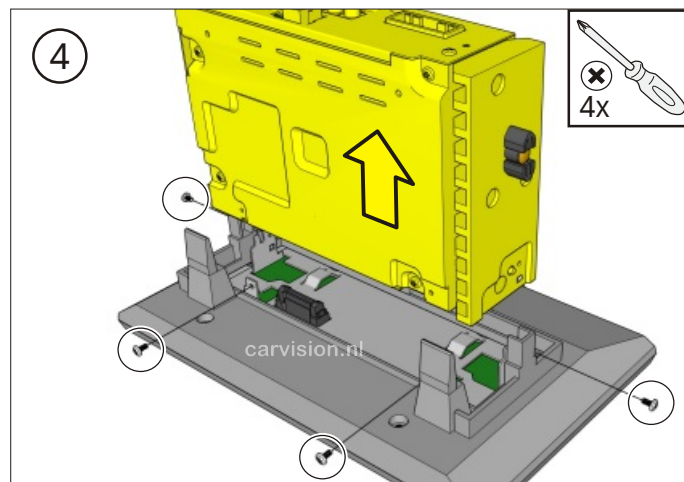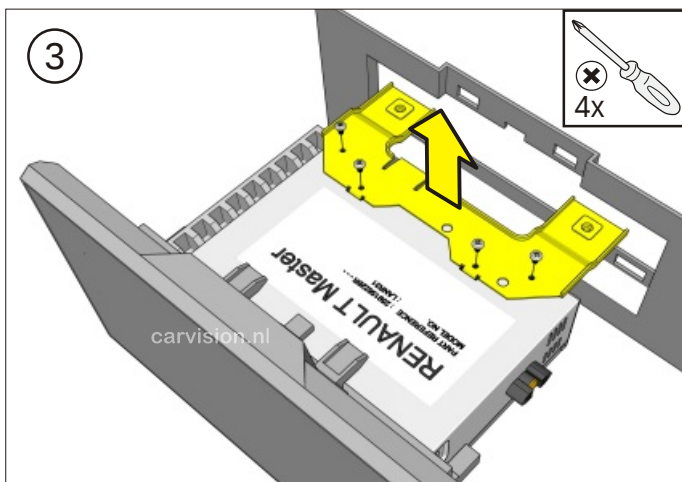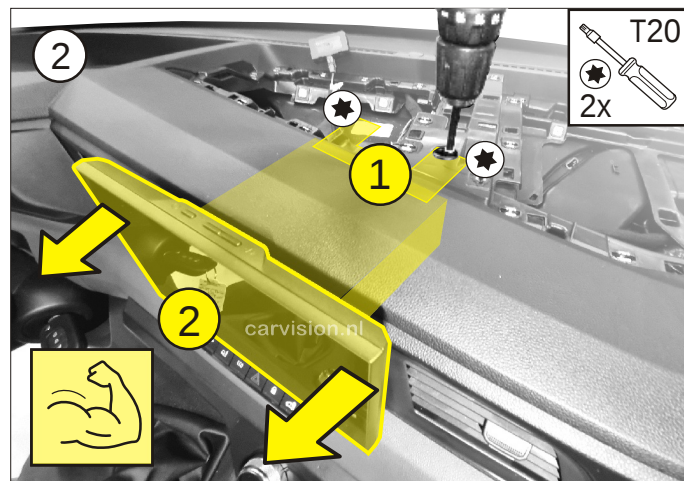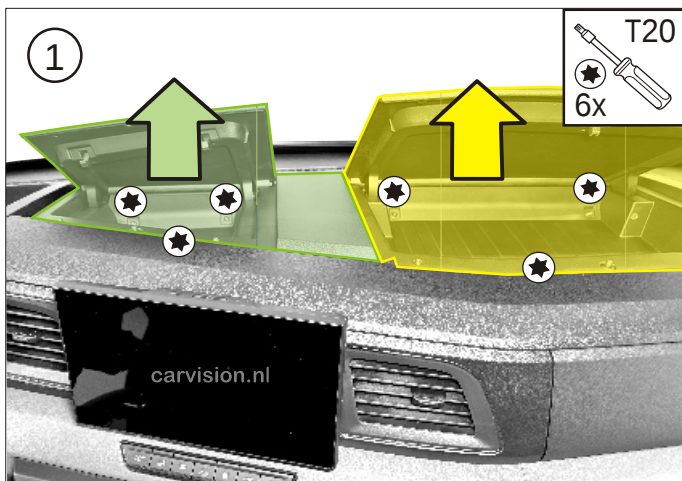


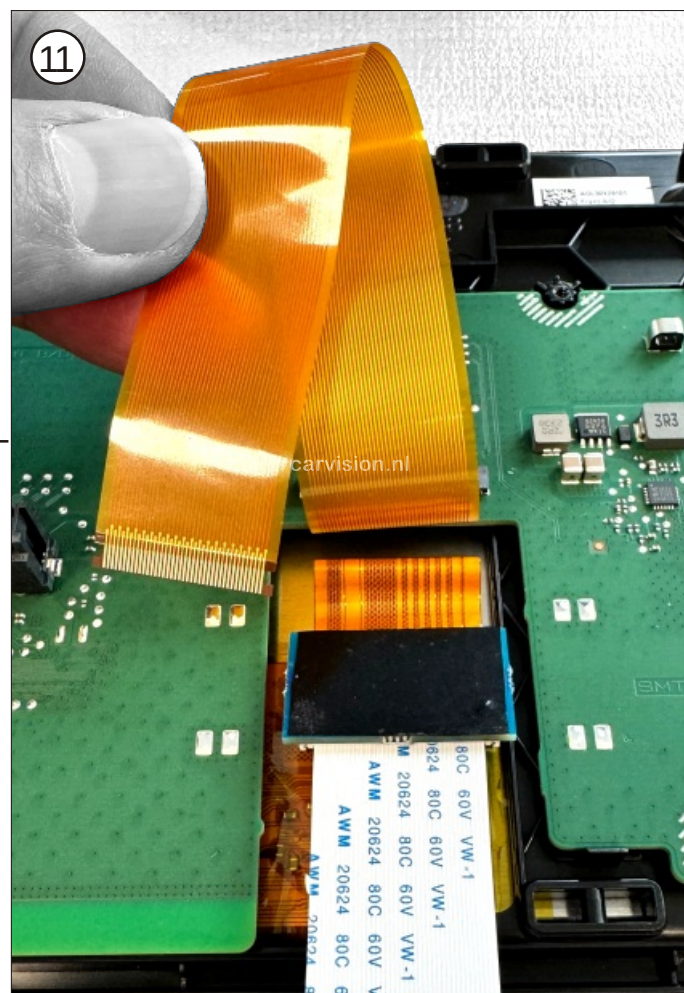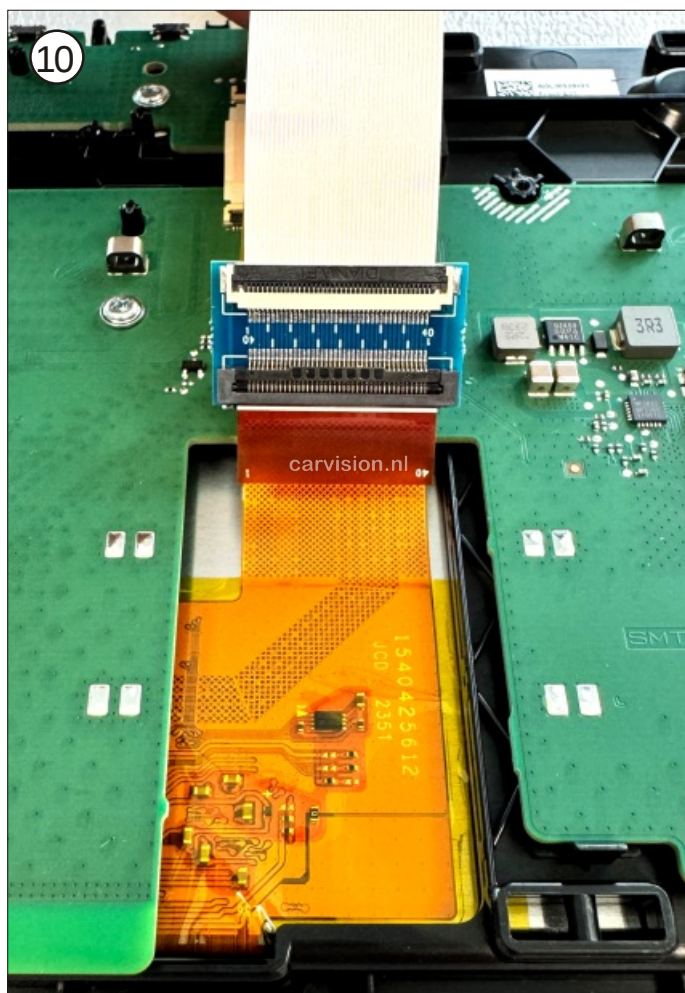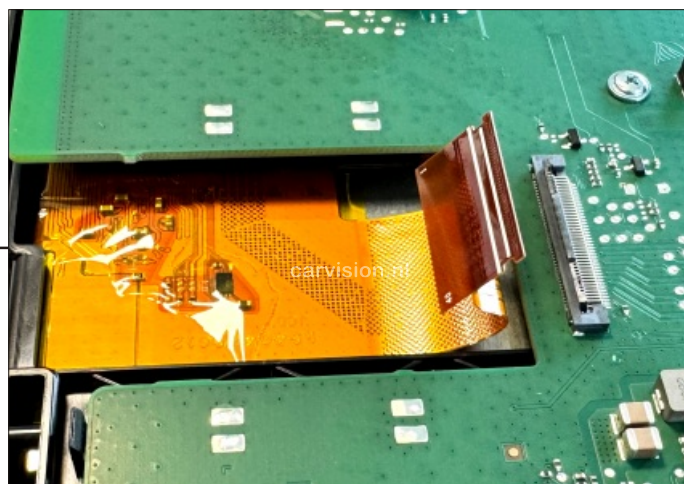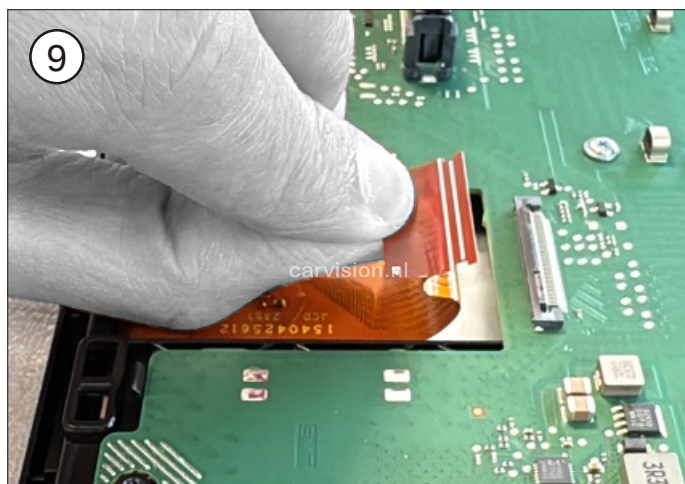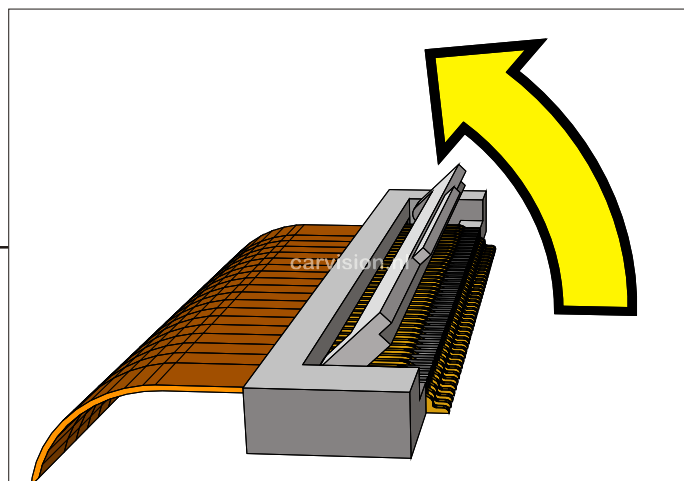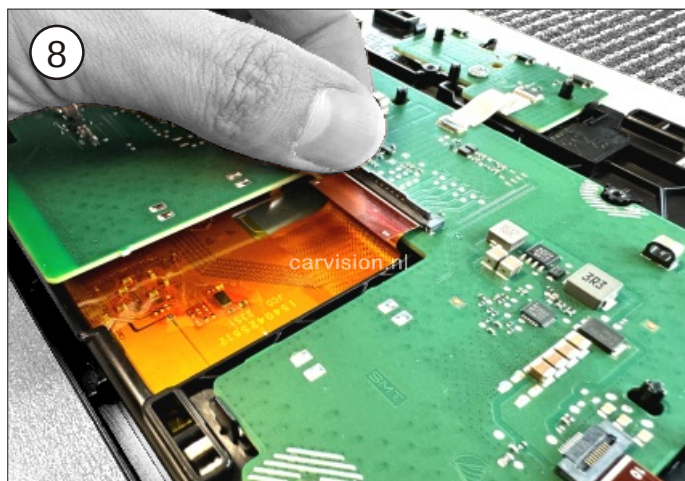

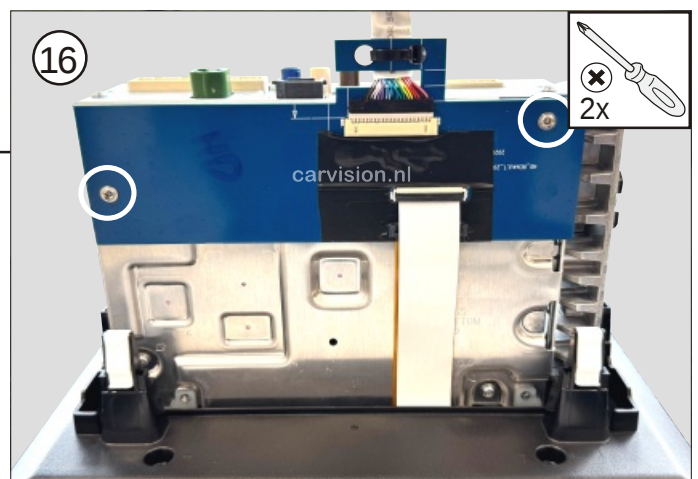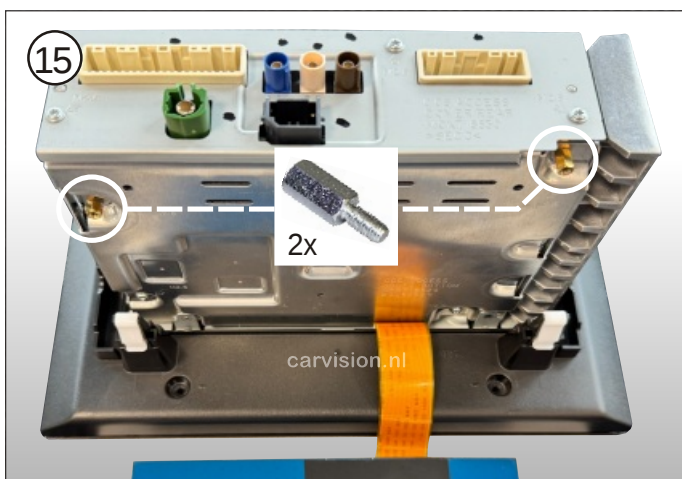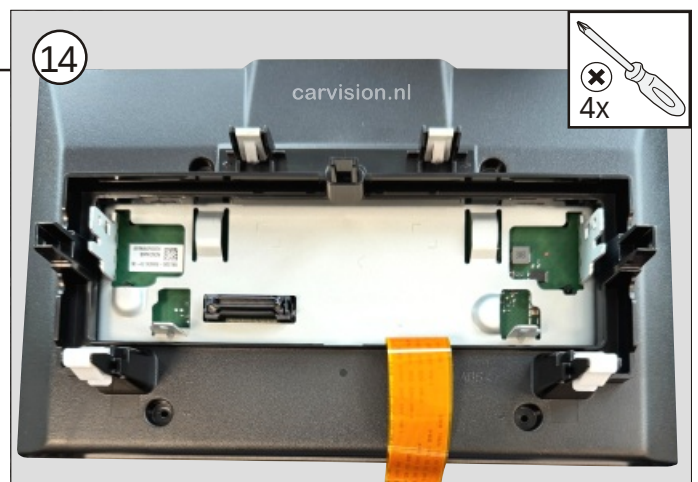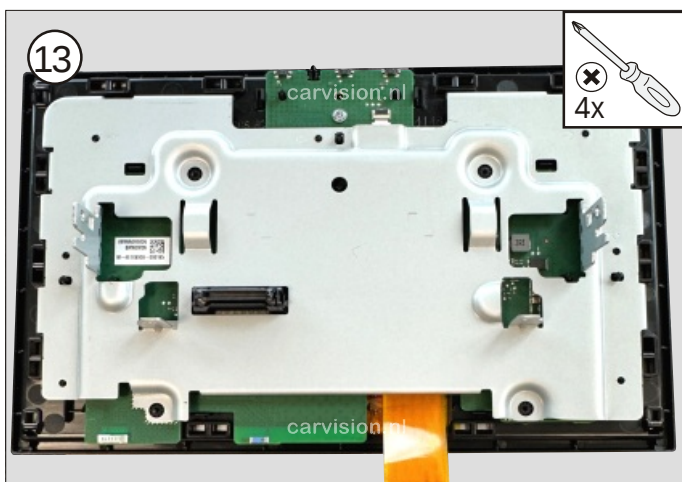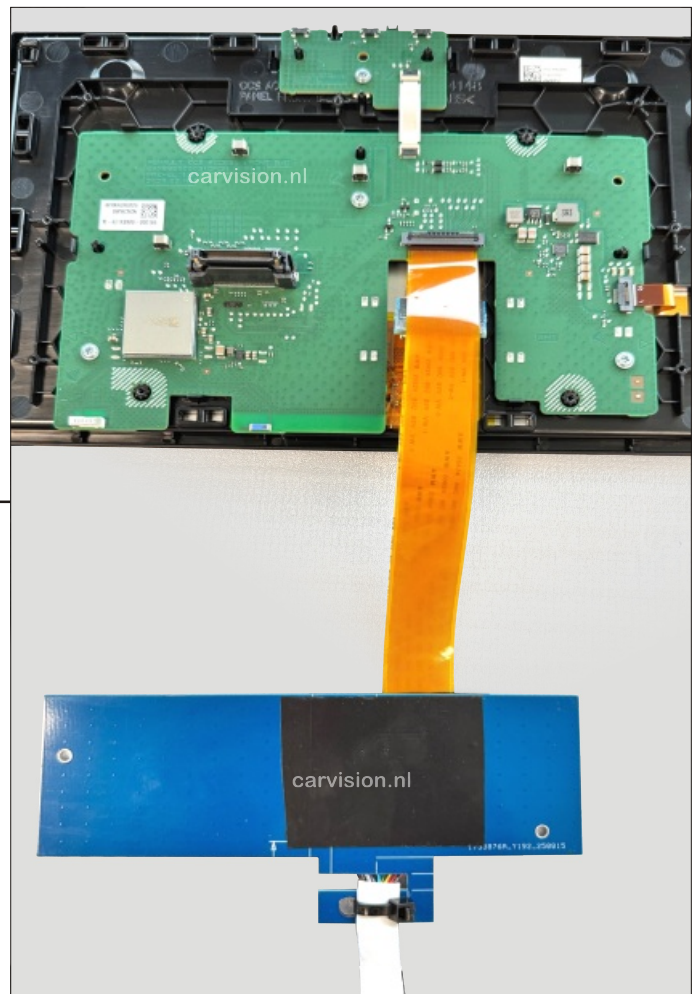
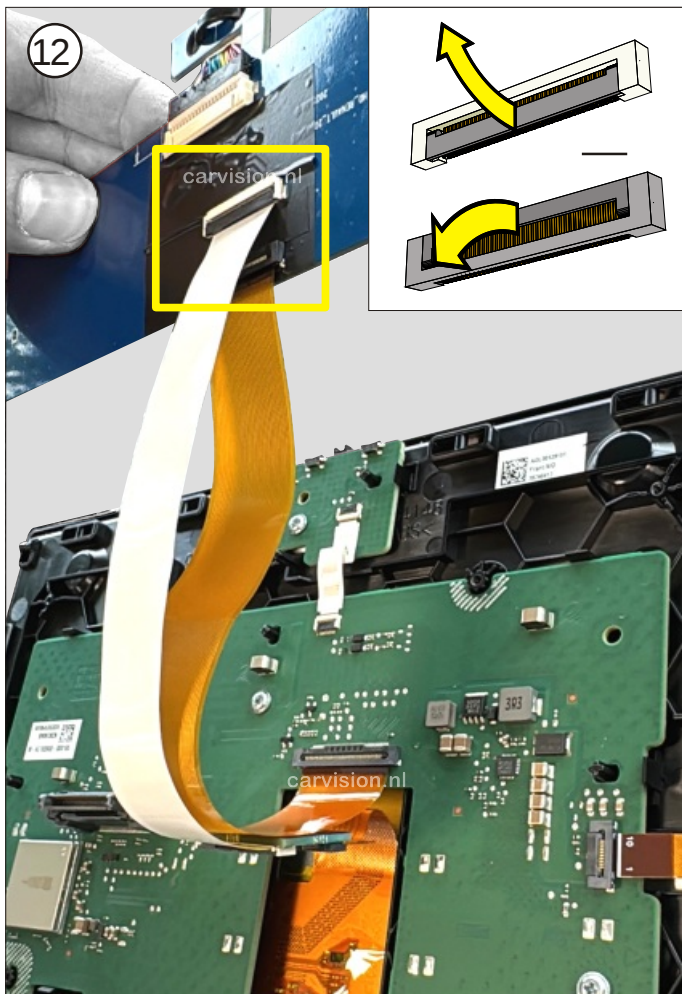


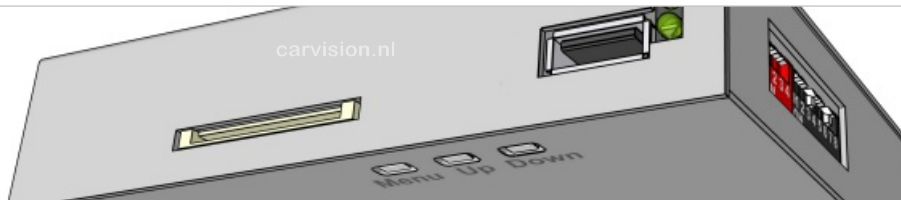



DIP 1,2,3,4 Must be UP (OFF)





Rear View Camera [V4] ↓ After market
Rear View Camera [V4] ↑ OEM

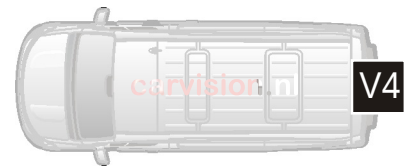



Show Front Camera [V3] after reverse
(Time adjust in MENU 5, 10, 15, 20 sec.)

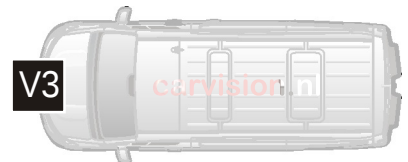



Right side Camera [V2]
(Activated by, CANbus, wire or switch)

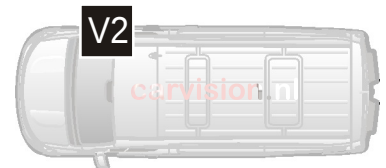

Left side Camera [V1]
(Activated by, CANbus, wire or switch)

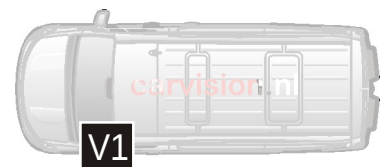


PDC icon active while reversing
(PDC sound will always remain active)

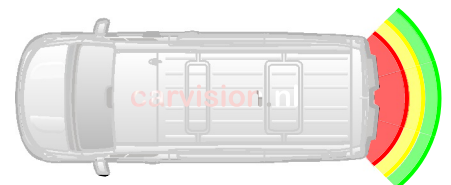

DIP 5,6,8 Must be UP (OFF)

Remark: Turn off the DIP inputs which are not used to avoid black screen!

It's recommended to RESET power after changing DIP settings

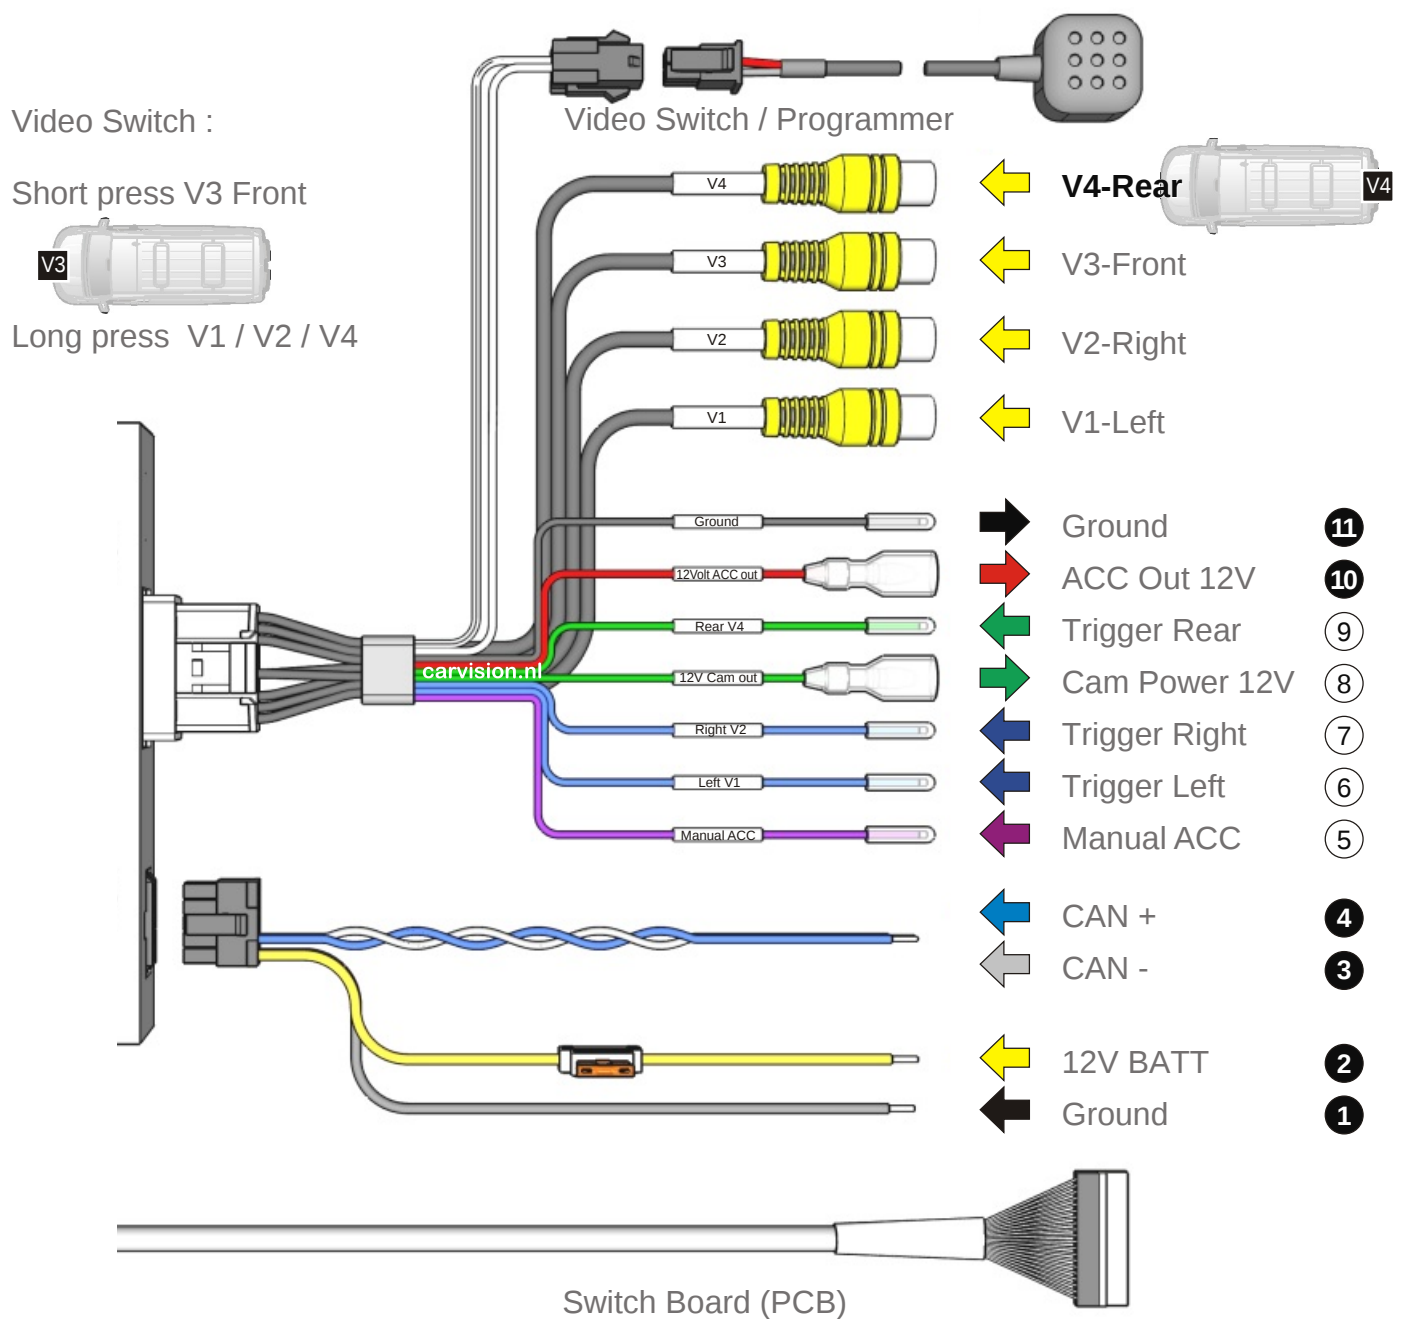

Interface wiring

Standard installation : Connect ①, ②, ③, ④ (CANbus)

Without CANbus (analog) : Connect ①, ②, ⑤




BE AWARE : Moving guidelines and PDC icon are not working!

Camera-power :


Ground ⑪, 12V ⑩ Active while ignition on / ⑧ Active while revering

ONLY when CAN signals are not recognized by the interface :

Connect ⑥, ⑦, ⑨ analog (Example turn signal light)

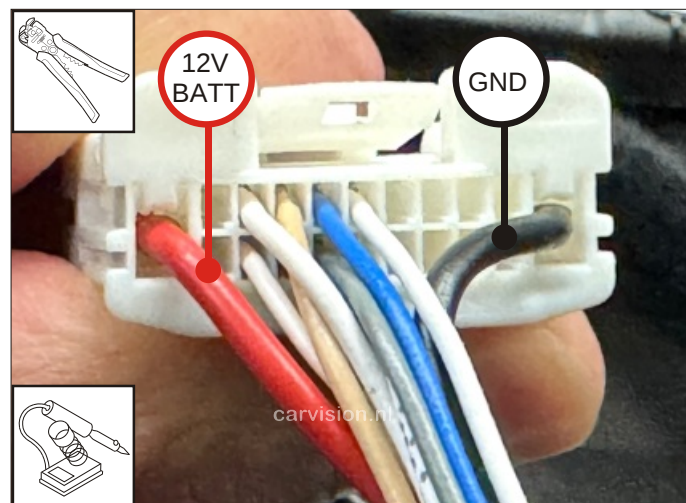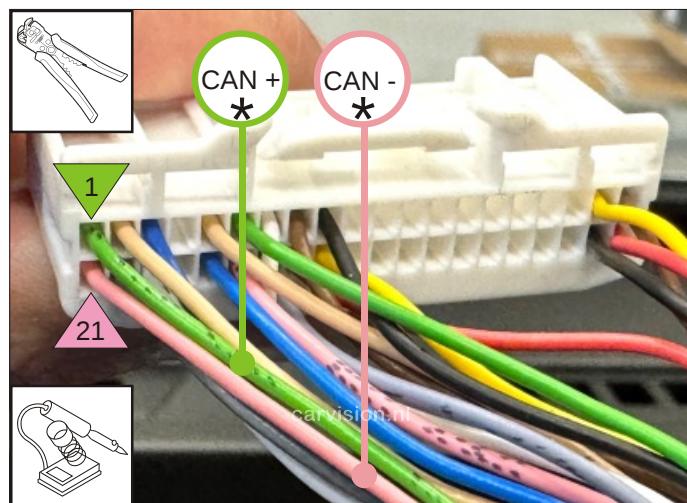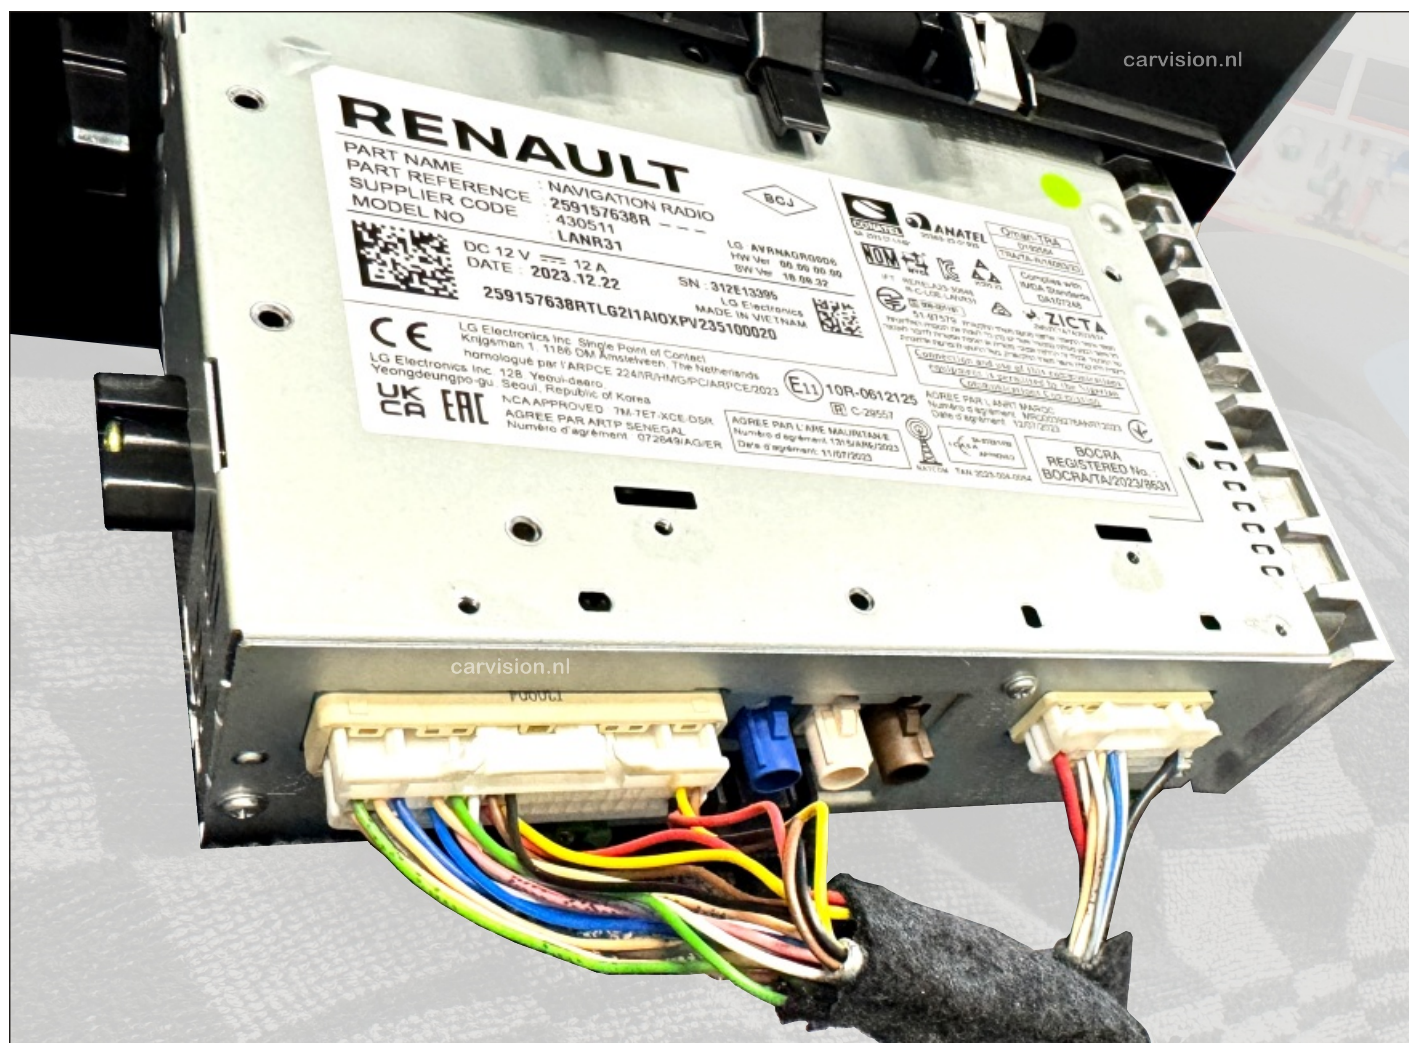

* CAN wire colors could be different, the positions are always the same: P1 = CAN + , P21= CAN -

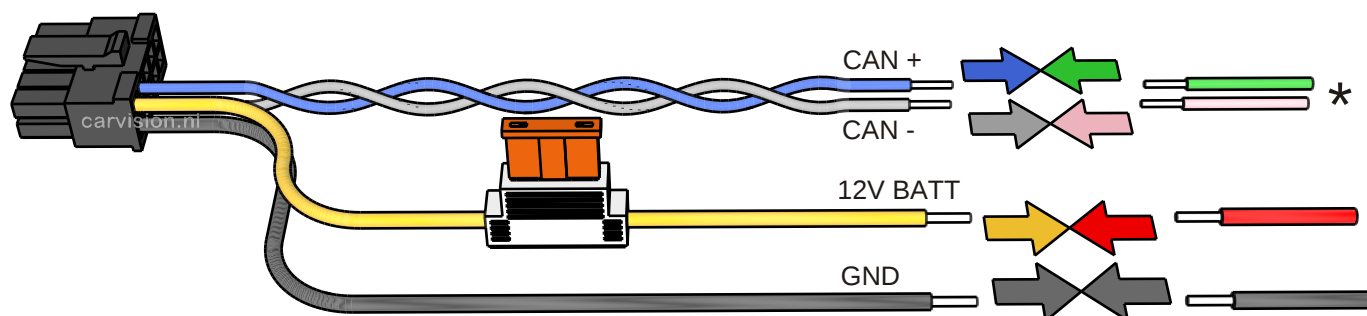



Menu of V4-REVERSE	
InputSource	NTSC
Brightness	50
Contrast	50
Trigger	Can
Trig-Priority	Rear-R-L
Guide-Type	Dynamic 1
Guide-PosV	37
GuideL-PosH	48
GuideR-PosH	87
Maxim-CURVE	20
External SW	YES


NTSC ▶ PAL ▶ 720P NTSC ▶ 720P PAL ▶ 960P NTSC ▶ 960P PAL ▶ 1080P NTSC ▶ 1080P PAL

V4






NO VIDEO CONNECTED!

or

Wrong video format selected in interface menu!
InputSource: PAL,NTSC,720P,960P,1080P . . .



Manual switch on the rear camera while driving forwards!

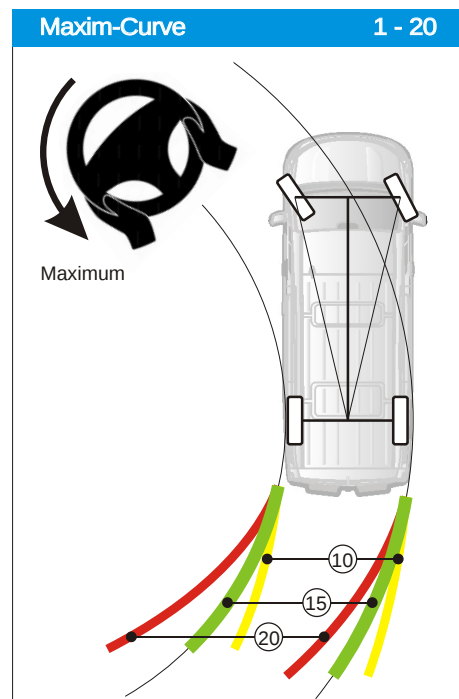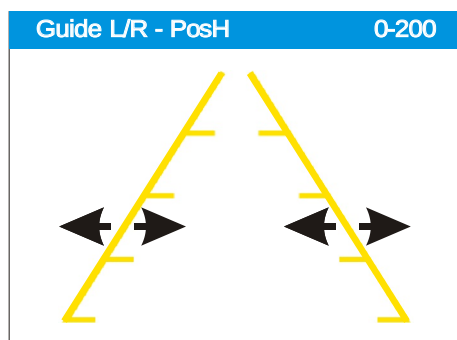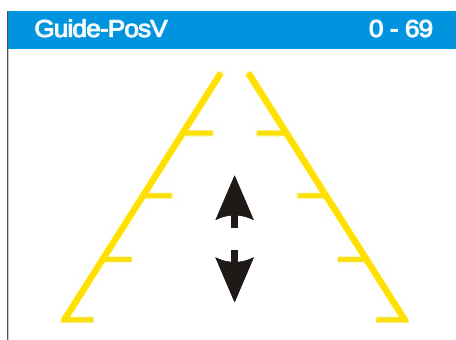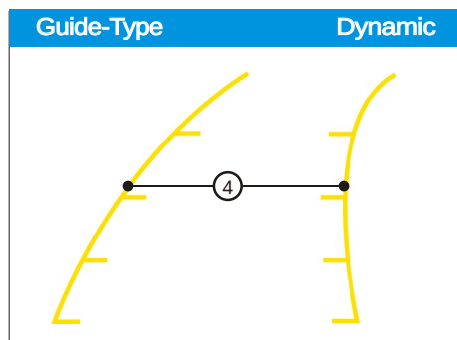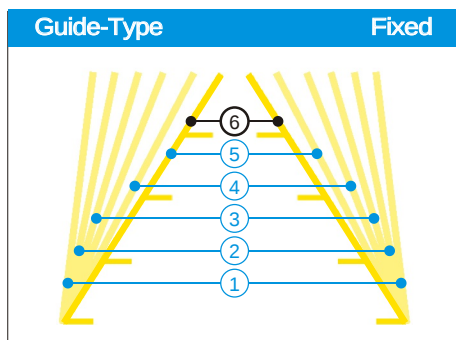

Menu of V3-FRONT	
InputSource	NTSC
Brightness	50
Contrast	50
Trigger	10s after REV
Trig-Priority	Rear-R-L

Show Front Camera [V3] after reverse [V4]

5 ▶ 10 ▶ 15 ▶ 20 seconds after Reverse

